


DUCHESNE COUNTY MONUMENT SURVEY RECORD


LINE	BEARING	DISTANCE
L1	S 08°13'57" E	166.70'
L2	S 80°53'51" W	16.44'
L3	N 24°00'25" W	109.35'

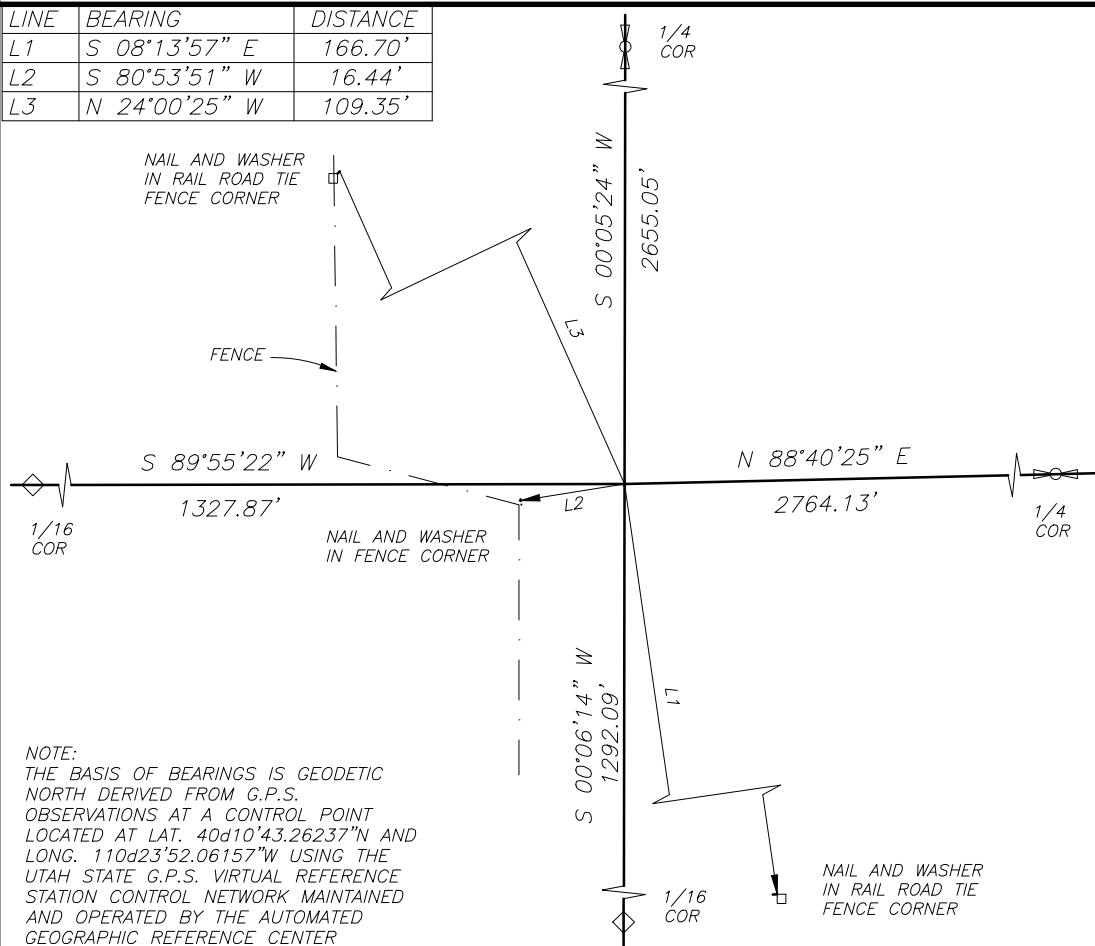

T3S
R5W R4W
SEC 36 | SEC 31
SEC 1 | SEC 6
T4S
U.S.B.&M.

A-1

		31	



SCALE: 1"=30'

0' 30'

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND A 3 1/4" BRASS G.L.O. CAP 10"
UNDER SURFACE OF GROUND AT
POSITION OF SECTION CORNER



MARKING ON MONUMENT

DESCRIPTION OF MONUMENT AND ACCESSORIES
ESTABLISHED TO PERPETUATE THE ORIGINAL
LOCATION OF THE CORNER

USED REFERENCE NAILS AND
ADJOINING CORNERS AS REFERENCE
POINTS AS SHOWN

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)
NAD83 UTAH CENTRAL ZONE
N: 7232372.861
E: 1950779.979
NAVD88 EL: 5643.68'

LATITUDE: 40°10'10.00671" N
LONGITUDE: 110°23'21.59741" W
ELLIPSOID HEIGHT: 5587.48'
 (GEOID 03 CONUS)

PUBLIC LAND SURVEY SYSTEM GCDB ID NO.
UT300030S0040W0 100100



PHOTO OF MONUMENT FACING NORTH

CERTIFICATION

I, Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same.

Date 11 DEC '17

*Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor*

